BUILDING INSULATION®

PRODUCT TECHNICAL DATA SHEET

PRISMI srl® Rubber powder

Wallsafe 0515 ®

The EU pioneer supplier of Rubber Granules Insulation since 1990

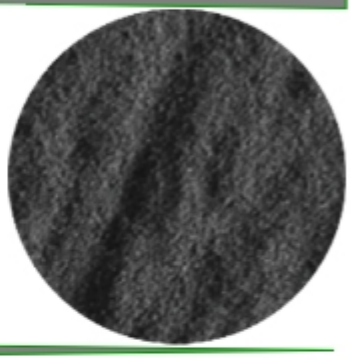

COMMERCIAL NAME: **WALLSAFE 0515**
SIZE: 0,5-1,5 mm
ID CORE RUBBER GRANULES: RUBBER SECONDARY RAW MATERIAL
SURFACE: COLORFUL
COLOR: BLACK

PHYSICAL PROPERTIES

Rubber Material		SBR 1500
Transport Bulk Density		0,63 (+/-0,3)
Uncompacted Bulk Density		0,57 (+/- 5%)
Absolut Density		1,18 (+/- 5%)
Type		100% Vulcanized Rubber
Hardness		55<>60 shore A
Moistness		0,5%
Dimensional	Lab Equipment	RETSCH EasySieve AS200 Screens: Test Sieve ISO3310-1
	Granulometry	Nominal size 0.5 mm to 1.5 mm
	Testing	Periodic granulometric analysis according to EN933-1 standard
Quantity x sqm (kg/sqm x Tn=3mm)		6 (+/-10%)
Use Method		**typical mortar: 50% sand+Wallsafe 0515, plus cement+ mortar and water**

Eco-friendly
*This product comes from a selection of fine vulcanized elastomers free of **Aromatic Polyciclic Hydrocarbons** as required by current environmental and safety regulations.*

Odor
The product does not emit any odor. The change in temperature for other types of elastomers compromises the release of aromas that are nauseating.

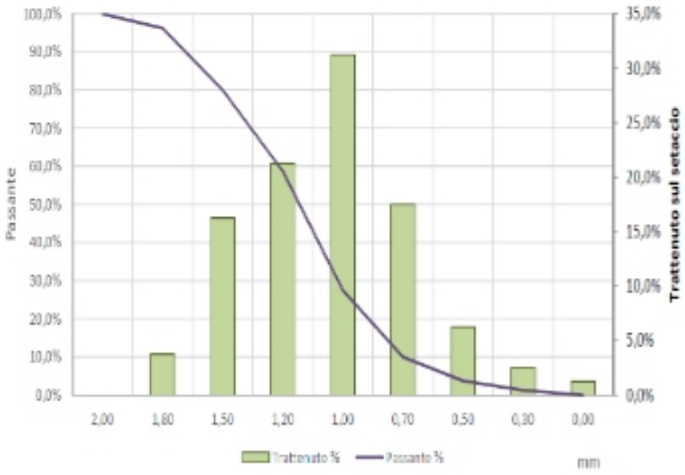

An innovative product in traditional installation!

quality austria SYSTEM CERTIFIED ISO 14001:2004 No.01558/0

CERTIFIED IQNet MANAGEMENT SYSTEM

30 YEARS ANNIVERSARY

PRISMI srl
Via dell'Industria 44, Monteprandone 63076 , Italy
www.rubber-granules.com